



MPO/MTP 24 FIBER TRUNK

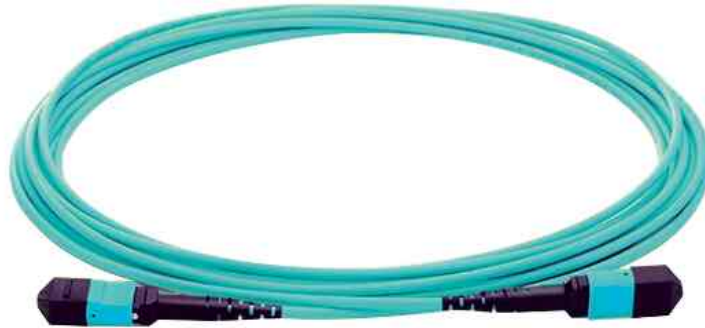

FEATURES

- Conform to IEC, EIA-TIA, and Telcordia performance requirements
- All Assemblies are machine polished providing highest quality
- Cable terminated with low loss 24 fiber MPO Connectors.
- All Assemblies are factory tested and come with test certificate.
- Factory pre-terminated assemblies with protocol for constant and reliable quality.

MPO/MTP CONNECTOR SPECIFICATION

Parameters	Units		Units	APC
Max IL – Standard	dB	≤ 0.75	Average IL	dB ≤ 0.25
Return loss SM (PC/APC)	dB	≥ 60		
Max IL– Premium	dB	≤ 0.35	Average IL	dB ≤ 0.10
Return loss (PC/APC)	dB	≥ 60		

ORDERING INFORMATION

MO* 1 2 3 4 5 6 7 8 DIST**

1	2	CONNECTOR	3	4	FIBER	5	CABLE CONSTRUCTION	6	JACKET COLOR	7	JACKET MATERIAL	8	POLARITY
K1	K1	24F MPO(F) STD	24-144	2D	G652D	D	MICROCABLE	Y	YELLOW	L	LSZH	A	POL B
K2	K2	24F MPO(M) STD		A1	G657A1	S	MICRO SINGLE	Q	AQUA	R	OFNR		
K3	K3	24F MPO(F) ELITE		A2	G657A2			V	ERIKA VIOLET	P	OFNP		
K4	K4	24F MPO(M) ELITE		O3	OM3								
				O4	Om4								

Example Part. No:

MTK3K424O3DQRA25

Trunk MTP24(Female) Elie-MTP24(Male) Elite 24FO MM OM3 Microcable Aqua Riser OFNR Polarity A 25Meters

*For MTP/MPO from Usconec PN to be MT instead MO. Corning Fiber available on request.

**The length input stands for total length, from connector to connector.