


PIGTAILS

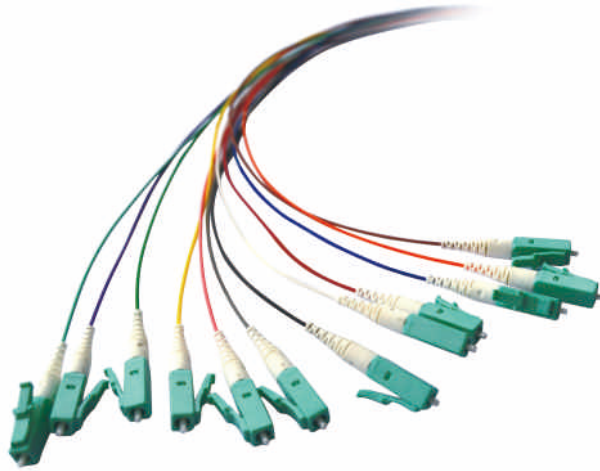

FEATURES

- Conform to IEC, EIA-TIA, and Telcordia performance requirements
- Single pack and multi coloured Rainbow 6 and 12 pack
- All Assemblies are machine polished providing highest quality
- Available in custom length and cable diameters
- All Assemblies are factory tested and come with test certificate
- Attenuation and Return Loss values specified against reference connectors.

CONNECTOR SPECIFICATION

Parameters	Units	
Insertion loss – Standard	dB	≤ 0.3
Return loss SM (PC/APC)	dB	≥ 50/60
Insertion loss – Premium	dB	≤ 0.15
Return loss (PC/APC)	dB	≥ 55/65

ORDERING INFORMATION

AX 1 2 3 4 5 6 7 8 DIST

1	CONNECTOR	2	FIBER	3	JACKET DIAMETER	4	BUFFER TYPE	5	JACKET COLOR	6	JACKET MATERIAL	7	PACKAGING	8	PERFORMANCE
S1	SC	D2	G652D	9	900	T	TIGHT	Y	YELLOW	L	LSZH	P	SINGLE	S	STANDARD
S2	SC APC	A1	G657A1	3	2MM	E	EASY	W	WHITE	R	OFNR	S	6 PACK	P	PREMIUM
L1	LC	A2	G657A2	2	3MM	S	SEMI TIGHT	R	RAINBOW	P	OFNP	T	12 PACK		
L2	LC APC	O3	OM3												
F1	FC	O4	Om4												
F2	FC APC														
T1	ST														

Example Part. No:

AXL1049TRLTS1.5

Pigtail LC OM4 Tight Buffer Rainbow Color 12 Pack 900um LSZH 1.5Meter