


## PATCH CORDS

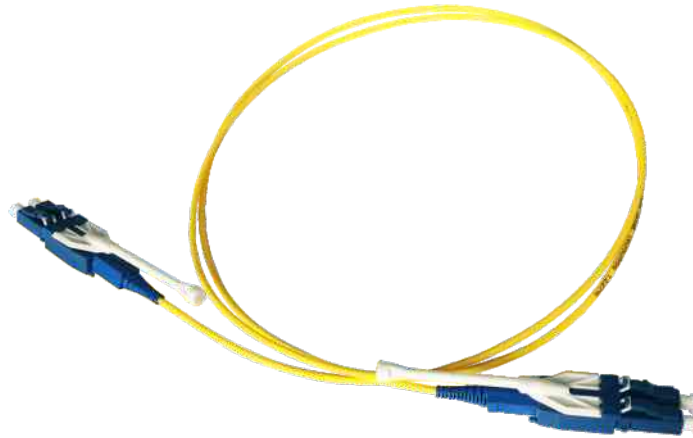

### FEATURES

- Conform to IEC, EIA-TIA, and Telcordia performance requirements
- All Assemblies are machine polished providing highest quality
- Available in custom made length and fibre glass.
- Different type of LC Connectors Standard Duplex, Uniboot and Uniboot Quick release Pull-Tab.
- All Assemblies are factory tested and come with test certificate

### CONNECTOR SPECIFICATION

Parameters	Units	
Insertion loss – Standard	dB	≤ 0.3
Return loss SM (PC/APC)	dB	≥ 50/60
Insertion loss – Premium	dB	≤ 0.15
Return loss (PC/APC)	dB	≥ 55/65

### ORDERING INFORMATION

AP 1 2 3 4 5 6 7 8 DIST

1	2	CONNECTOR	3	CONFIG	4	FIBER	5	JACKET DIAMETER	6	JACKET COLOR	7	JACKET MATERIAL	8	PERFORMANCE
S1	S1	SC	S	SIMPLEX	D2	G652D	2	2MM	Y	YELLOW	L	LSZH	S	STANDARD
S2	S2	SCAPC	D	DUPLEX	A1	G657A1	3	3MM	Q	AQUA	R	OFNR	P	PREMIUM
L1	L1	LC	R	ROUND DX	A2	G657A2			V	ERIKA VIOLET	P	OFNP		
L2	L2	LCAPC			O1	OM1			O	ORANGE				
L3	L3	LC UNIBOOT			O3	OM3								
L4	L4	LCAPC UNIBOOT			O4	Om4								
L5	L5	LC PULL TAB												
L6	L6	LCAPC PULL TAB												
F1	F1	FC												
F2	F2	FCAPC												
T1	T1	ST												
J1	J1	MTRJF												
E1	E1	E2000												
E2	E2	E2000 APC												
	XX	OPEN END												

Example Part. No:

**APL5L5RA12YLP**

Patch Cord LC-LC Premium Pull Tab Uniboot SM G657A1 2mm Yellow LSZH